


JJI-Joist and Glulam site storage

Protect Joists and Glulam from the elements.
Keep them dry.





Use supports at about 3.0m
spacing to keep Joists and
Glulam clean, level and above
the ground.

Use suitable lifting
equipment to offload
Joist and Glulam
bundles.

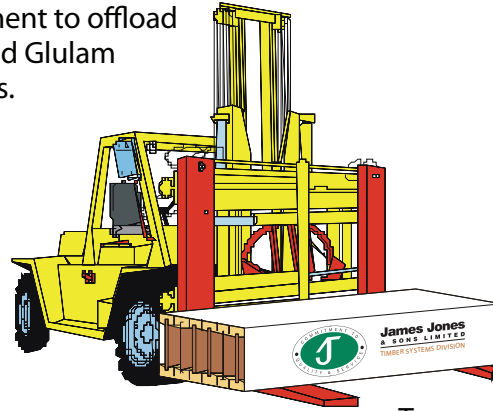

Transport Joists on edge,
not flat.

Store Joists on edge.

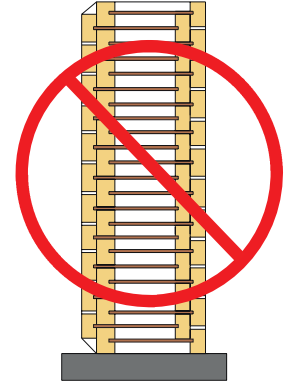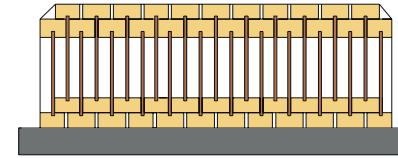

DO NOT store Joists flat.



DO NOT lift Joists by top flange.



DO NOT lift Joists on the flat.